


FISUFOR $\emptyset$ 5 mm

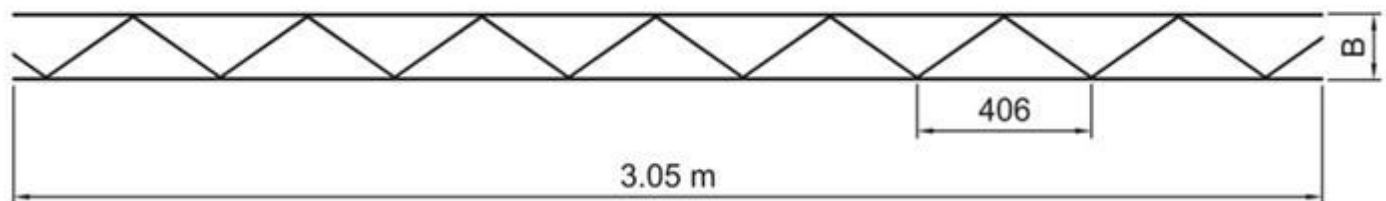

Codice Code	Larghezza Width B	$\emptyset$ Est./Int. $\emptyset$ Ext./Int. mm	Pz/Conf. Pz/Pack	Pz/Pallet
1383	50 mm	5 / 3,7	20	480
1384	80 mm	5 / 3,7	20	480
1385	100 mm	5 / 3,7	20	480
1386	150 mm	5 / 3,7	20	320
1387	200 mm	5 / 3,7	20	160
1388	250 mm	5 / 3,7	20	160
1389	300 mm	5 / 3,7	20	160

Caratteristiche tecniche

Technical characteristics

Carico di snervamento Yield strength 600 MPa

Resistenza al taglio delle saldature > 5000 N
Shear resistance of the welds

Conforme alla norma NBN EN 845-3:2013
According to NBN EN 845-3+2013



Il DOZ diametro 5 mm è un'armatura in acciaio zincato per murature. E' costituita da due fili longitudinali paralleli, saldati ad un filo continuo diagonale. Grazie alla sua forma peculiare ed alle caratteristiche, DOZ migliora la resistenza e la longevità della costruzione e delle sue pareti. Previene crepe dovute a ritiro, movimento o vibrazione.

DOZ is a prefabricated wall armour made of galvanized steel and consisting of two parallel longitudinal wires, which are welded to a continuous diagonal wire. Owing to its unique shape and the quality of the wires, DOZ reinforcement improves the resistance of the wall construction and prevents cracks which could occur due to shrinkage, movement or vibration.

Rivestimento di zinco: Filo zincato a caldo con un rivestimento di zinco di almeno 60 gr/m²
Zinc coating: Hot dipped galvanized wire with a zinc coating of at least 60 gr/m²

